



1 SECTION 1 INTERIOR LADDER
A6.0 3/4"=1'-0"

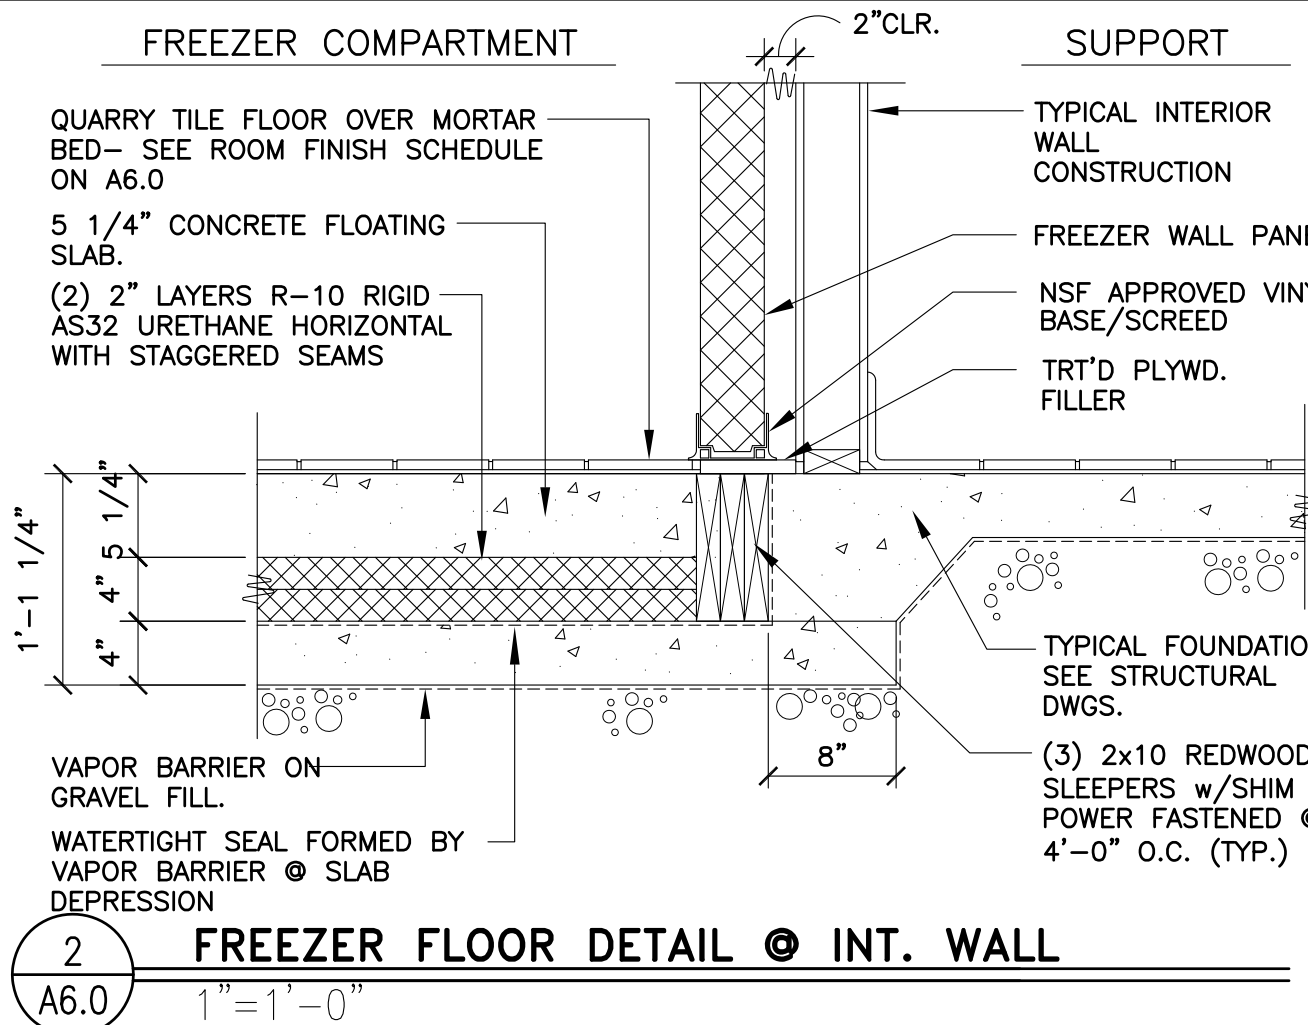


2 FREEZER FLOOR DETAIL 2 INT. WALL
A6.0 1"=1'-0"

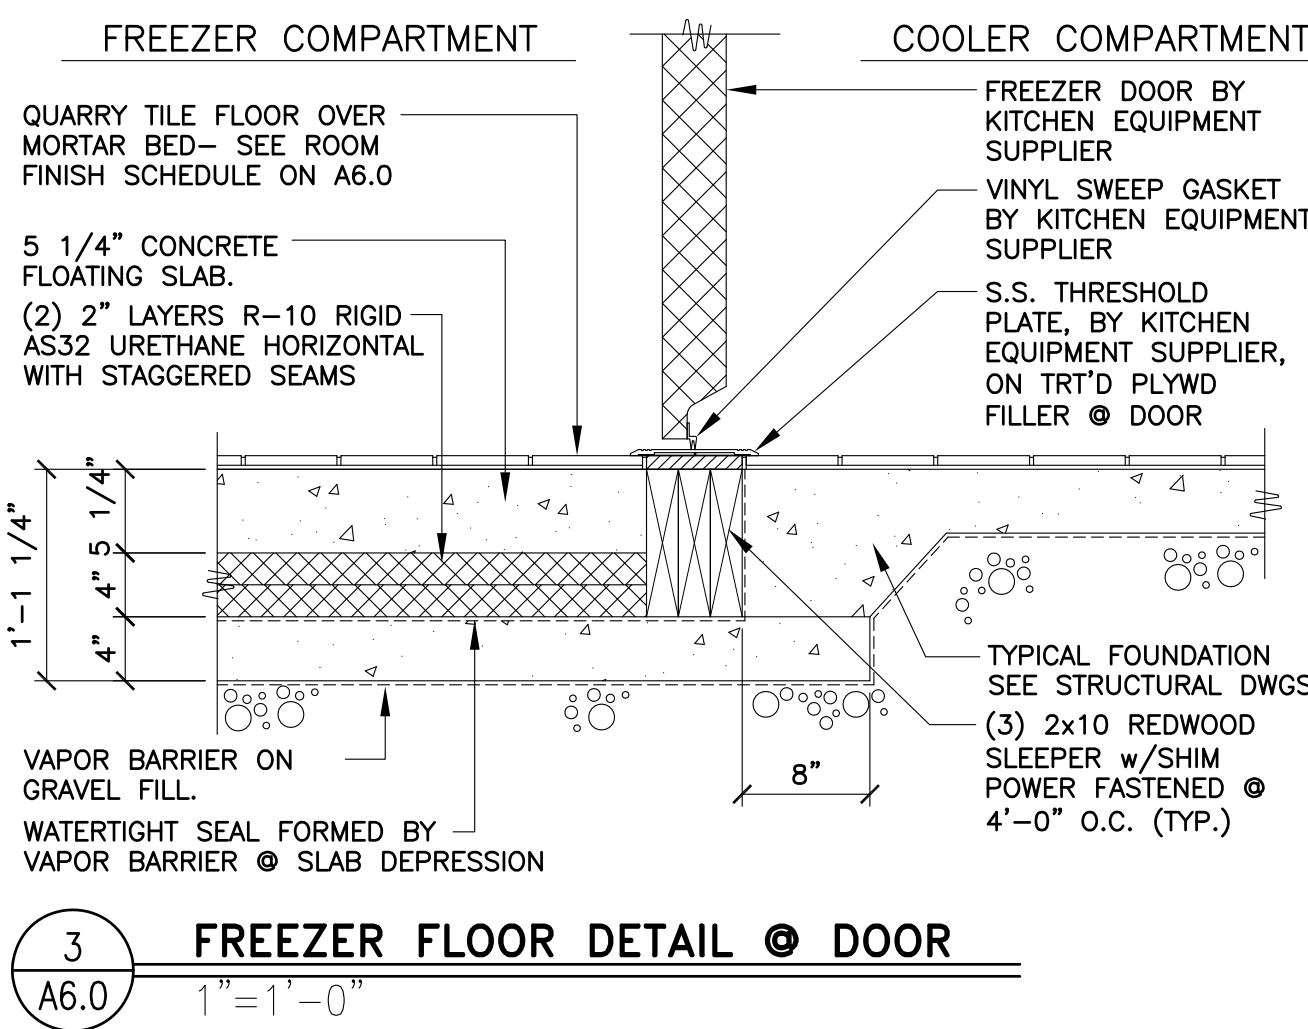


3 FREEZER FLOOR DETAIL 3 DOOR
A6.0 1"=1'-0"

NOTE:
1. BUTT FINISH & TRIM PIECES TO S.S. ENDCAP & CORNER GUARD.
2. CORNER GUARDS & END CAPS TYPICAL AT KITCHEN, SUPPORT ROOM, & SELF SERVE BEVERAGE AREAS
3. SEE 'CG' KEY NOTE ON A1.0

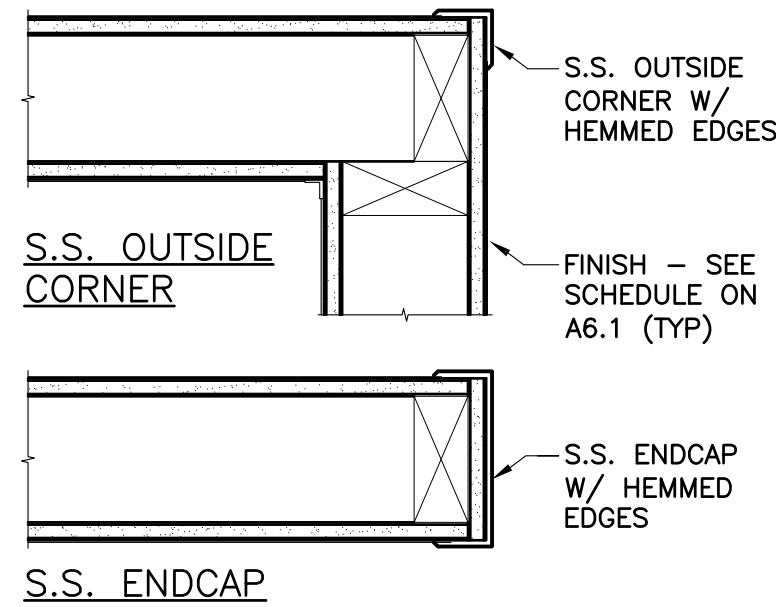


4 S.S. ENDCAP STAINLESS STEEL DETAILS
A6.0 1/2"=1'-0"

NOTE:
SEE FINISH SCHEDULES & DETAILS ON SHEET A6.1 FOR BASE INFORMATION. STEP BASE MATERIAL W/RAISED SLAB

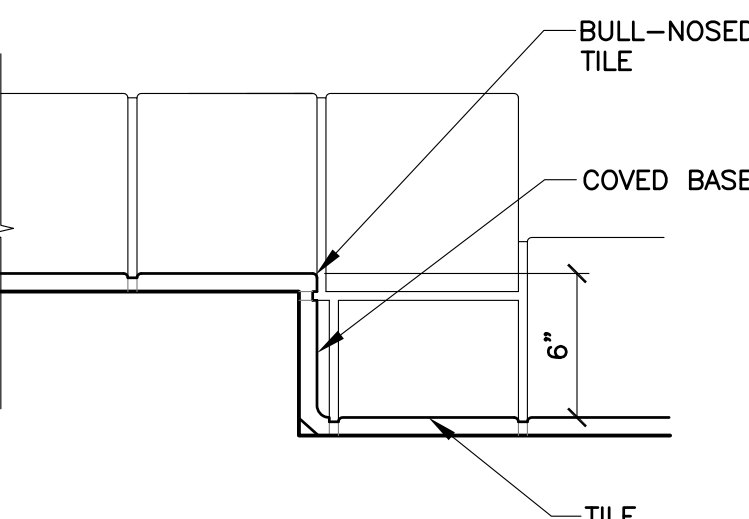

5 DETAIL RAISED SLAB
A6.0 1 1/2"=1'-0"

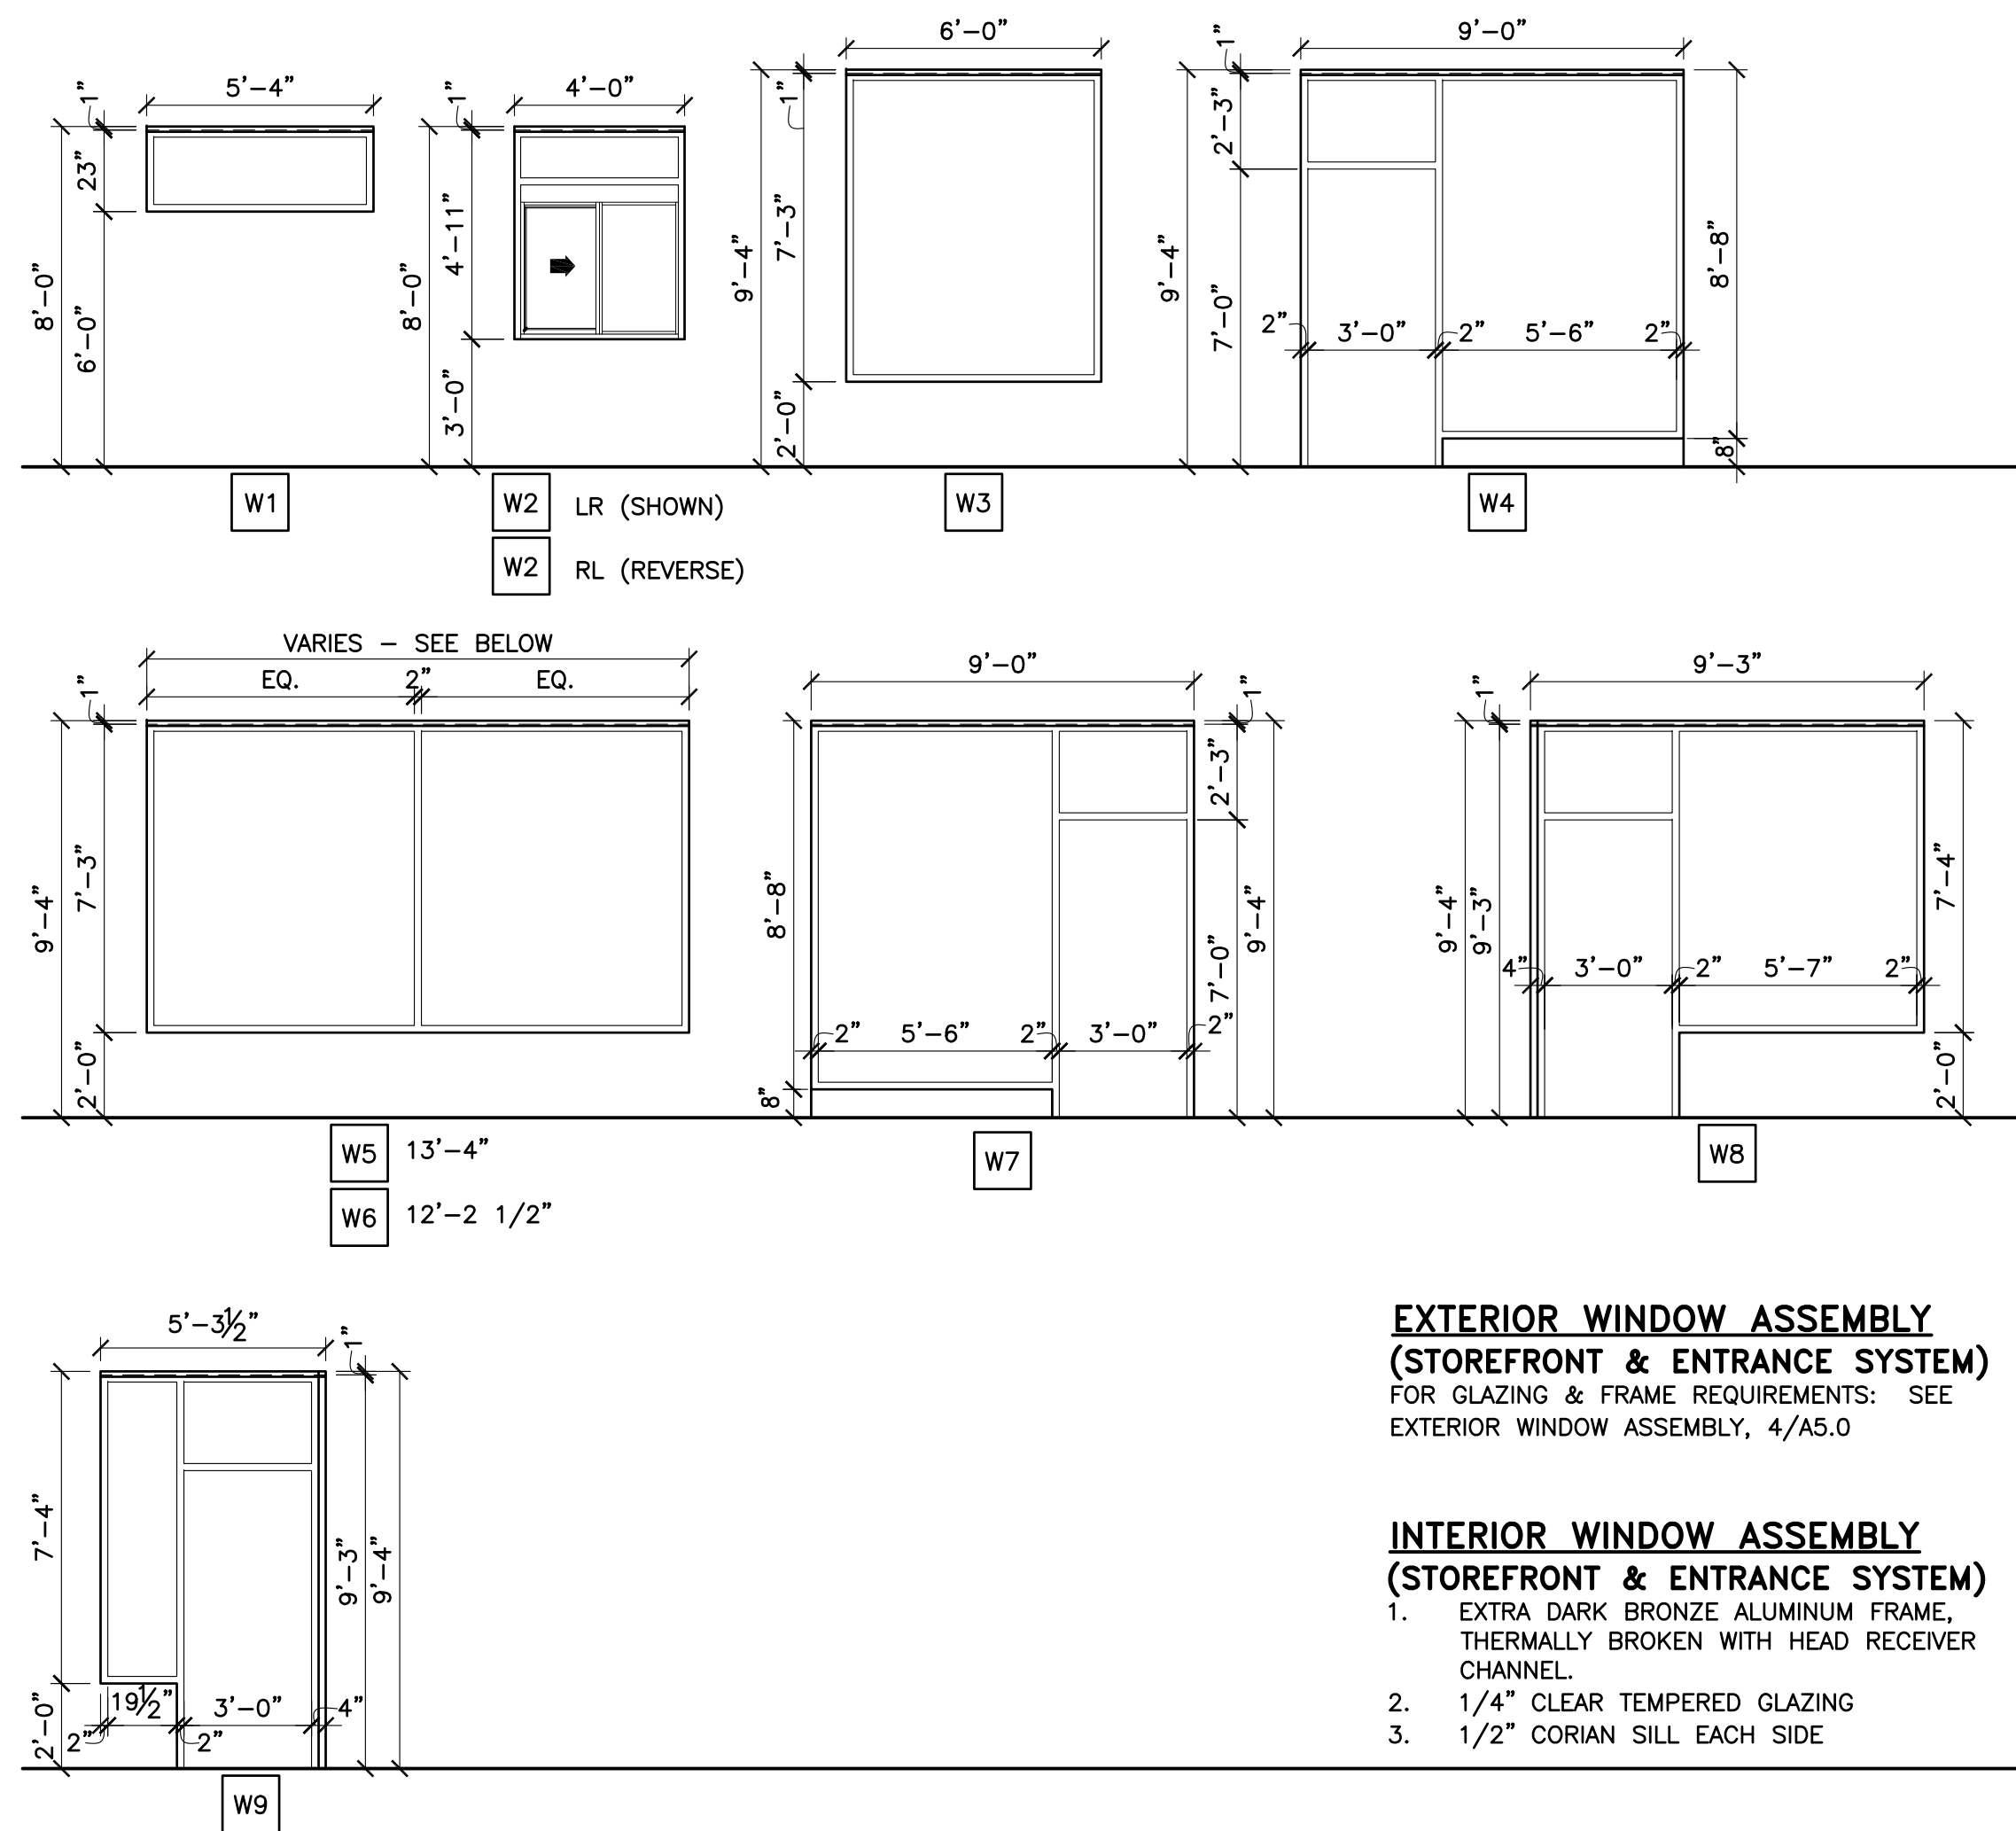

EXTERIOR WINDOW ASSEMBLY (STOREFRONT & ENTRANCE SYSTEM)
FOR GLAZING & FRAME REQUIREMENTS: SEE EXTERIOR WINDOW ASSEMBLY, 4/A5.0

INTERIOR WINDOW ASSEMBLY (STOREFRONT & ENTRANCE SYSTEM)
1. EXTRA DARK BRONZE ALUMINUM FRAME, THERMALLY BROKEN WITH HEAD RECEIVER CHANNEL.
2. 1/4" CLEAR TEMPERED GLAZING
3. 1/2" CORIAN SILL EACH SIDE

GENERAL NOTES:

1. ALL EXIT DOORS SHALL BE KEYLESS IN THE DIRECTION OF EGRESS.
2. THE OPENING FORCE OF ALL EXT. PUSH/PULL DOORS SHALL NOT EXCEED 8 1/2 LBS.
3. THE OPENING FORCE OF ALL INTERIOR PUSH/PULL DOORS SHALL NOT EXCEED 5 LBS.
4. PROVIDE PANIC HARDWARE FOR ALL EXTERIOR DOORS AS NOTED ON THE DOOR SCHEDULE.
5. ALL DOOR HARDWARE SHALL NOT REQUIRE TIGHT GRASPING, TIGHT PINCHING OR TWISTING OF THE WRIST TO OPERATE.

DOOR #1 & #1A - ENTRY DOOR/EMERGENCY EXIT (1A NOT USED)

1. 1 EA CLOSER LCN 4021 x 18
2. 3 EA HINGES OFFSET PIVOT ANSI -A-156.4 GRADE 1; PROVIDE EXPOSED PARTS OF CAST ALUMINUM ALLOY, AS SUPPLIED BY DOOR MANUFACTURER.
3. 1 EA (DOOR #1 ONLY) PULL HANDLE ROCKWOOD MFG. MODEL: RM3301. SIZE: 1'-1/4" DIA. CTC: 5'-10". FINISH: TO MATCH STOREFRONT DOOR. OFFSET MOUNTING: TYPE 1XHD - THRU BOLT HEAVY DUTY
4. 1 EA PANIC HARDWARE ADAMS RITE MFG. CO. 8800 SERIES WITH OUTSIDE CYLINDER (FINISH TO MATCH STOREFRONT DOOR)
5. 1 EA THRESHOLD NATIONAL GUARD PRODUCTS, INC. SADDLE TYPE THRESHOLD 325, 36" WIDE x 1/2" RISE (ADA ACCESSIBLE).
6. 1 EA WEATHER STRIPPING: PROVIDE COMPRESSION WEATHER STRIPPING AGAINST FIXED STOPS. AT OTHER EDGES PROVIDE SLIDING WEATHER STRIPPING RETAINED IN ADJUSTABLE STRIP MORTISED INTO DOOR EDGE. PROVIDE EPDM OR VINYL GASKET WEATHER STRIPPING IN BOTTOM DOOR RAIL ADJUSTABLE FOR CONTACT W/ THRESHOLD.
7. 1 EA SIGN MOUNT ONTO DOOR, TO READ "THIS DOOR MUST REMAIN UNLOCKED WHENEVER THE BUILDING IS OCCUPIED/DURING BUSINESS HOURS."

DOOR #2 - VESTIBULE

1. 1 EA CLOSER LCN 4041 x 18
2. 3 EA HINGES OFFSET PIVOT ANSI -A-156.4 GRADE 1; BY DOOR MANUFACTURER.
3. 1 EA PUSH/PULL HANDLE HAGER PUSH/PULL SET 164D/V/B.

DOOR #3 - STORAGE DELIVERY

1. 1 EA HINGE 780-112HD 83" ALUM HAGER
2. 1 EA CLOSER 4111 H-CUSH ALUM LCN
3. 1 EA PANIC 9975EO-LD 48" SP28 V.DUPRIN
4. 1 EA TRIM 990DT US260 V.DUPRIN
5. 1 EA EXIT ALARM EAX2500 FLUSH DETEX
6. 1 EA LOCKGUARD CLP110 US32D DON-JO
7. 1 EA TREADPLATE 24 X 46 UMCO
8. 1 EA WITH/STP160V 48 X 84 N.GUARD
9. 1 EA THRESHOLD 325HD 48" N.GUARD
10. 1 EA SWEEP 101VA 48" N.GUARD
11. 1 EA VIEW FRAME LVGLFMD 9 X 9 DKB W/FLAP ON INSIDE N.GUARD

DOOR #3A - FREEZER DELIVERY

1. 1 EA HINGE780-112HD 83" ALUM HAGER
2. 1 EA DEADBOLT B661P 626 SCHLAGE
3. 1 EA PULL H3E US28 HAGER
4. 1 EA LOCKGUARD CLP110 US32D DON-JO
5. 1 EA TREADPLATE 24 X 46 UMCO
6. 1 EA WITH/STP 160V 48 X 84 N.GUARD
7. 1 EA THRESHOLD 325HD 48" N.GUARD
8. 1 EA SWEEP 101VA 36" N.GUARD

DOOR #4 - REAR EXIT

1. 1 EA HINGE 780-112HD 83" ALUM HAGER
2. 1 EA CLOSER 4111 H-CUSH ALUM LCN
3. 1 EA PANIC 9975EO-LD 36" SP28 V.DUPRIN
4. 1 EA TRIM 990DT US260 V.DUPRIN
5. 1 EA EXIT ALARM EAX2500 FLUSH DETEX
6. 1 EA LOCKGUARD CLP110 US32D DON-JO
7. 1 EA TREADPLATE 24 X 34 UMCO
8. 1 EA WITH/STP160V 36 X 84 N.GUARD
9. 1 EA THRESHOLD 325HD 36" N.GUARD
10. 1 EA SWEEP 101VA 36" N.GUARD
11. 1 EA VIEW FRAME LVGLFMD 9 X 9 DKB W/FLAP ON INSIDE N.GUARD

DOOR #5 - RESTROOM ENTRY

1. 3 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA CLOSER LDPA4031 SNB ALUM LCN
3. 1 EA PUSH PLATE 30S 4 X 32 US32D 40"AFF MOUNTED TO CENTER OF PLATE
4. 1 EA PULL PLATE LADDER PULL HANDLE WITH DECORATIVE FIXING, 32L 1"DIA #5-32-1000 - UMCO 32D, 40" AFF MOUNTED CENTER OF PULL
ALT. OPTION: 1 EA PULLPLATE SANITARIAP
5. 2 EA KICKPLATE 190S 8 X 34 US32D HAGER
6. 1 EA DOOR STOP 236W US32D HAGER
7. 1 EA FINGER GRD MKIA PUSH SIDE BRN F.SAFE
8. 1 EA FINGER GRD MKIB PULL SIDE BRN F.SAFE
9. 1 EA STEP/PULL PLATE SIDE (OPTIONAL)

DOOR #6 - ADA STALL

1. 2 EA HINGE 1250 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
3. 1 EA DEADBOLT BS71 X 10-087 214EE X 12 X 291 X 626
4. 2 EA BACK TO BACK LADDER PULL HANDLE, 16L, 1"DIA #5-16-1000 BTB-UMCO 32D MOUNTED 6" FROM EDGE OF DOOR TO CENTER OF SCREWS - 28 1/2" MOUNTED 28 1/2" FROM TOP OF DOOR TO C/L OF PULL
5. 1 EA ROBE HOOK 917 BRADLEY
6. 1 EA DOOR STOP 236W US32D HAGER

DOOR #6A - STANDARD STALL

1. 2 EA HINGE 1250 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
3. 1 EA DEADBOLT BS71 X 10-087 214EE X 12 X 291 X 626
4. 2 EA BACK TO BACK LADDER PULL HANDLE, 16L, 1"DIA #5-16-1000 BTB-UMCO 32D MOUNTED 6" FROM EDGE OF DOOR TO CENTER OF SCREWS - 28 1/2" MOUNTED 28 1/2" FROM TOP OF DOOR TO C/L OF PULL
5. 1 EA ROBE HOOK 917 BRADLEY
6. 1 EA DOOR STOP 236W US32D HAGER

DOOR #7 - DINING ROOM JANITORS CLOSET

1. 3 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA LOCK ND80PD RHO 626 SCHLAGE

DOOR #8 - COMPUTER CLOSET

1. 4 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA LOCK ND80PD RHO 626 SCHLAGE
3. 1 EA LOUVER L700RX DKB 12 X 18 N.GUARD

DOOR #8A - COMPUTER CLOSET

1. 8 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA LOCK ND80PD RHO 626 SCHLAGE
3. 2 EA FLUSH BOLT 283D US260 HAGER

DOOR #9 - COOLER

1. ALL DOOR HARDWARE FOR THE REFRIGERATED COOLER / FREEZER SHALL BE PROVIDED BY THE MANUFACTURER.
- MANUFACTURER: KOLPAK @ HY 641 N. MCCORKLE PARK ROAD, PARSONS, TN 38363 PHONE: 800-344-4675

HARDWARE PROVIDED:

1. MAGNETIC PERIMETER DOOR GASKET
2. THRESHOLD REINFORCED PLASTIC (FRP)
3. POSI-SEAL DOOR CLOSURE
4. STATIONARY CHROME DOOR PULL HANDLE
5. INTERIOR SAFETY RELEASE HANDLE
6. HINGES - BRUSHED CHROME CAST ALLOY

DOOR #10 CREW

1. 1 EA HINGE 780-112HD 83" ALUM HAGER
2. 1 EA CLOSER 1461 RW/PA ALUM LCN
3. 1 EA PANIC 9975EO-LD 36" SP28 V.DUPRIN
4. 1 EA ELEC STRIKE 621T 24V DC FSE US32D SCHLAGE
5. 1 EA PWR SUPPLY PS902 SCHLAGE
6. 1 EA DOOR BELL BSV-24P SURFACE MOUNTED
7. 3 EA PUSH BUTTON 621-RD-DA HDP 626 SCHLAGE
8. 1 EA TREADPLATE 24 X 34 UMCO
9. 1 EA VIEW FRAME LFR100 6 X 27 DKB N.GUARD
10. 1 EA GLASS 5 X 26 X 1/4 UMCO

DOOR #14 (NOT USED) MANAGERS OFFICE

1. 3 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA LOCK ND05PD RHO 626 SCHLAGE
3. 1 EA VIEW FRAME LFR100 24 X 30 DKB N.GUARD
4. 1 EA GLASS 23 X 29 X 1/4 CLEAR UMCO

DOOR #15 CO2

1. 1 EA HINGE 780-112HD 83" ALUM HAGER
2. 1 EA LOCK ND80PD RHO 626 SCHLAGE
3. 1 EA LOCK GUARD CLP110 US32D DON JO
4. 1 EA WITH/STP 160V 36 X 84 N.GUARD
5. 1 EA THRESHOLD 425E 36" N.GUARD
6. 1 EA SWEEP 101VA 36" N.GUARD
7. 1 EA SEC. LOUVER LVRSG-3 DKB 18 X 18 N.GUARD

DOOR #16 (NOT USED) CREW ROOM


1. 3 EA HINGE BB1279 4 1/2 X 4 1/2 US260 HAGER
2. 1 EA LOCK ND10S RHO 626 SCHLAGE
3. 1 EA VIEW FRAME LFR100 24 X 30 DKB N.GUARD
4. 1 EA GLASS 23 X 29 X 1/4 CLEAR UMCO

DOOR SCHEDULE

MARK	DOOR	MATERIAL	SIZE	TYPE	FRAME	SIZE
1	ALUM.	3'-0"x7'-0"x1 3/4"	A	ALUM.	(NOTE 5)	
1A		NOT USED				
2	ALUM.	3'-0"x7'-0"x1 3/4"	A	ALUM.	(NOTE 5)	
3	H.M.	4'-0"x7'-0"x1 3/4"	B	H.M.	2"JAMB 4"HEAD	
3A	H.M.	4'-0"x7'-0"x1 3/4"	C	H.M.	2"JAMB 4"HEAD	
4	H.M.	3'-0"x7'-0"x1 3/4"	B	H.M.	2"JAMB 4"HEAD	
5	S.C. WOOD W/ LAM.	3'-0"x6'-8"x1 3/4"	C	H.M.	2"JAMB 4"HEAD	
6	S.C. WOOD W/ LAM.	3'-0"x4'-8"x1 3/4"	D	H.M.	2"JAMB 4"HEAD	
6A	S.C. WOOD W/ LAM.	2'-6"x4'-8"x1 3/4"	D	H.M.	2"JAMB 4"HEAD	
7	S.C. WOOD W/ LAM.	3'-0"x6'-8"x1 3/4"	C	H.M.	2"JAMB 4"HEAD	
8	S.C. WOOD W/ LAM.	2'-0"x8'-0"x1 3/4"	C	H.M.	2"JAMB 4"HEAD	
8A	S.C. WOOD W/ LAM.	(2) 1'-0"x8'-0"x1 3/4"	E	H.M.	2"JAMB 4"HEAD	
9	INSULATED METAL	3'-0"x6'-6"x4"	C	N/A	N/A	
10	H.M.	3'-0"x7'-0"x1 3/4"	F	H.M.	2"JAMB 4"HEAD	
11		NOT USED				
12		NOT USED				
13		NOT USED				
14	S.C. WOOD W/ LAM.	3'-0"x6'-8"x1 3/4"	H	H.M.	2"JAMB 4"HEAD (NOT USED)	
15	H.M.	3'-0"x7'-0"x1 3/4"	G	H.M.	2"JAMB 4"HEAD (NOT USED)	
16	S.C. WOOD W/ LAM.	3'-0"x6'-8"x1 3/4"	H	H.M.	2"JAMB 4"HEAD (NOT USED)	

GENERAL DOOR NOTES:

1. GC TO INSTALL ACCESSIBILITY DOOR SIGNS WHERE REQ'D BY LOCAL CODES - SEE GENERAL NOTE 6, SHEET A1.0
2. DETEX ALARM CONTACT SWITCHES SHALL BE RECESSED INTO THE TOP OF THE DOOR & HOLLOW METAL FRAME ABOVE
3. DOORS, DOOR FRAMES, & HARDWARE FOR DOORS 3, 3A, 4, 5, 6, 6A, 7, 8, 8A, 10, 14, 15, 16 SUPPLIED BY: UNIVERSAL MANUFACTURING 1-800-821-1414.
4. DOOR 9 SUPPLIED BY FREEZER/COOLER MANUFACTURER
5. SEE ELEVATIONS AND WALL SECTIONS
6. ALL INTERIOR SOLID CORE WOOD DOORS TO HAVE A LAMINATED FINISH, AS INDICATED PER DECOR DWGS
7. DOOR 8 & 8A - LAMINATED FINISH - "WILSONART DOVE GREY" D92-60
8. DOOR 3, 3A, 4 & 15 TO HAVE MAXIMUM U VALUE = 0.37

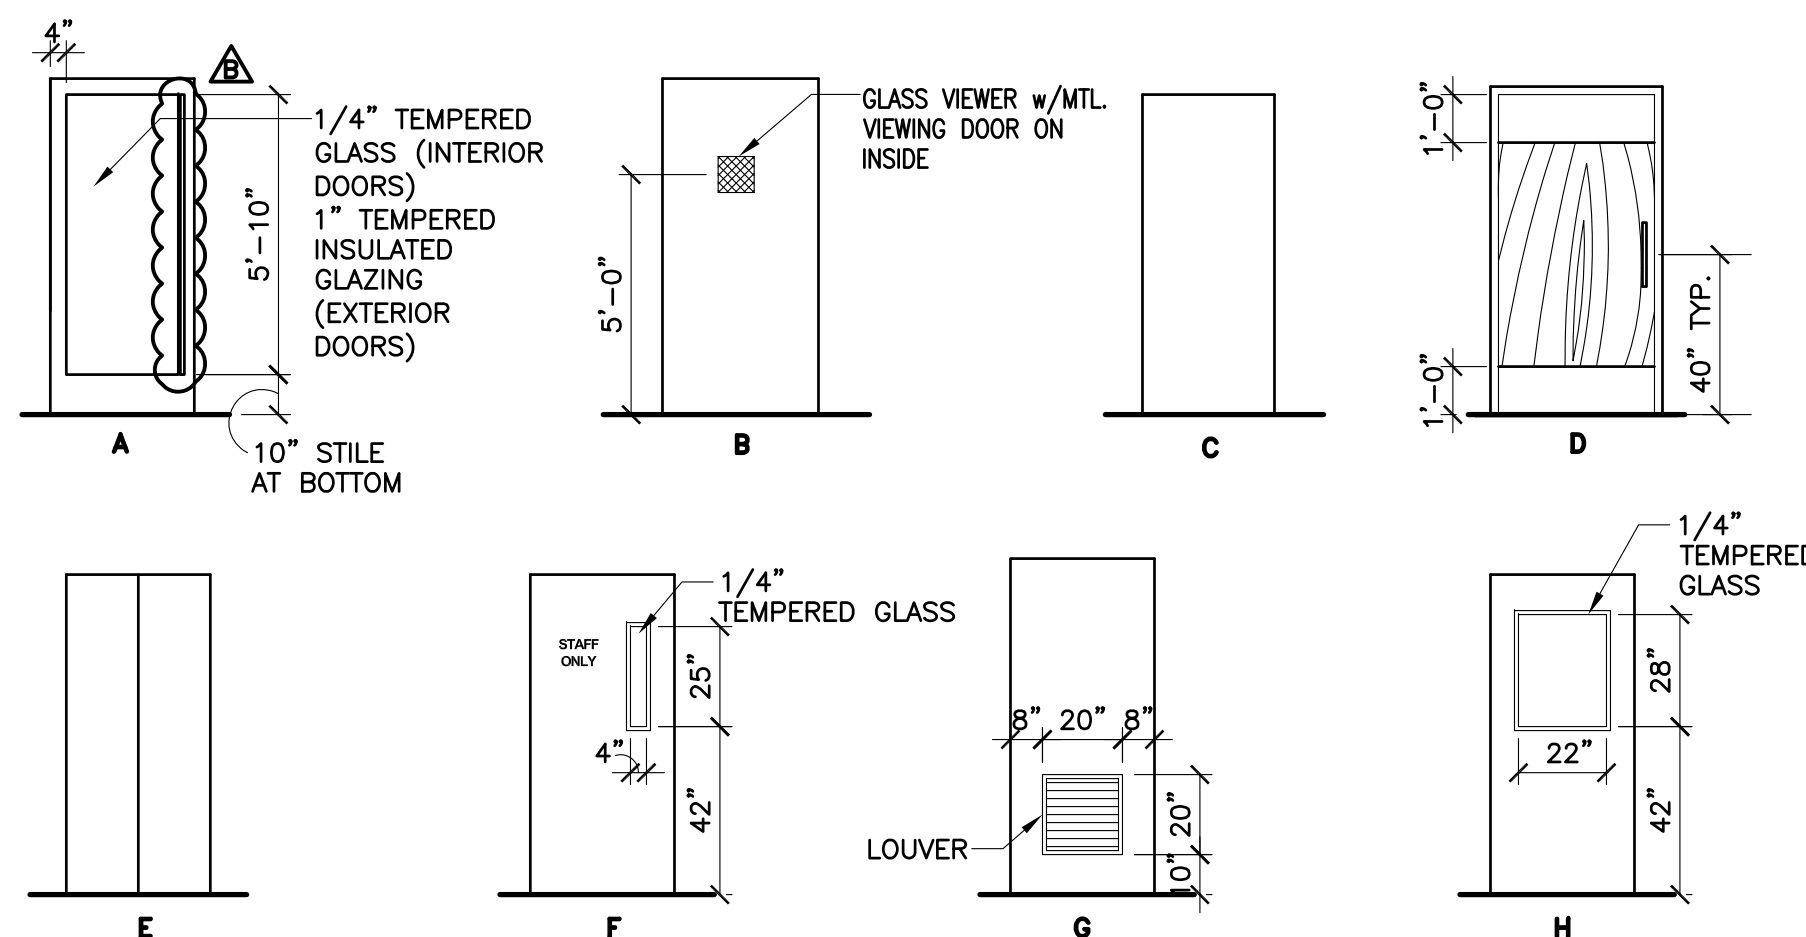

DOOR TYPES