


#### NOTES:

- ALL DIMENSIONS SHOWN ARE TAKEN TO CEMENT BD.
- SEE 2/A1.0 FOR PARTITION TYPES
- SEE SHEETS A6.0 & A6.1 FOR DOOR AND FINISH SCHEDULES.
- SEE 4/A4.0 FOR FIXTURE MOUNTING HEIGHTS
- DASHED LINES REPRESENTING CLEAR FLOOR SPACE REQUIREMENTS MUST BE MAINTAINED WITHOUT EXCEPTION. IF CONDITIONS PREVENT ANY CLEAR FLOOR SPACE FROM BEING MAINTAINED, CONTACT THE ARCHITECT FOR RESOLUTION.

(X) = RESTROOM ACCESSORY - SEE 3/A4.0

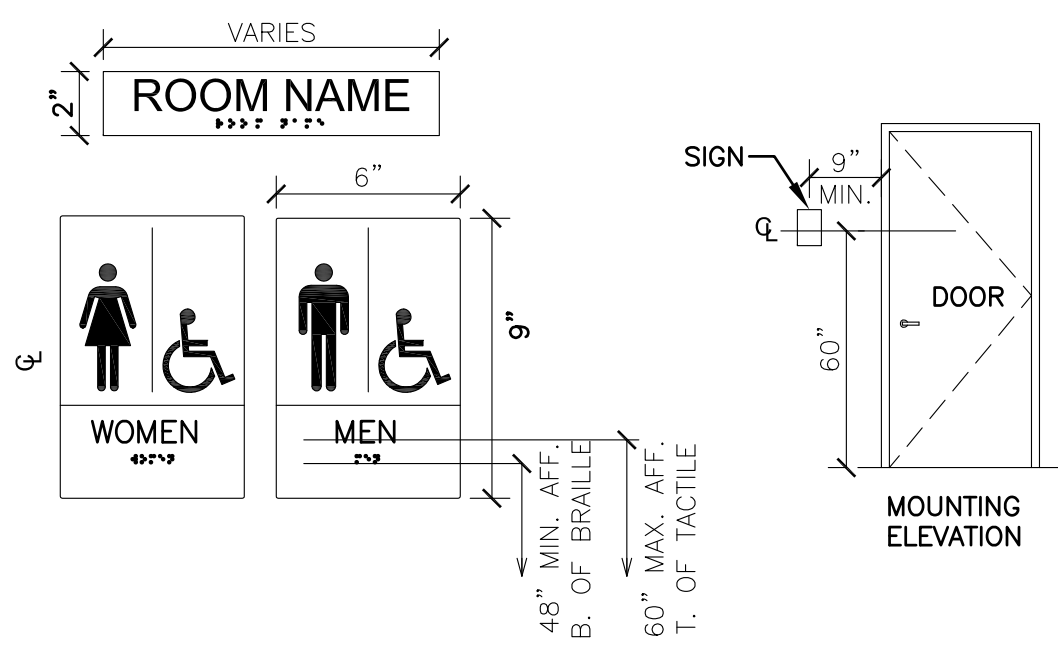


GRAPHICS SHOWN ARE FOR REFERENCE ONLY.

GC TO PROVIDE ADA SIGNAGE PACKAGE AND INSTALL SIGNS AT LOCATIONS AND POSITIONS INDICATED IN PACKAGE OR AS REQUIRED BY LOCAL CODES. SIGNAGE PACKAGE SUPPLIED BY:

FORREST PERMA-SIGN  
9292 1ST ST., BOX 588  
NEW ROCHELLE, NY 10802  
www.forrestpermasigns.com  
1-800-214-8765

#### SIGNAGE NOTES:

- EACH EXIT DOOR SHALL HAVE A TACTILE SIGN, INCLUDING RAISED LETTERS AND BRAILLE, STATING "EXIT" AND SHALL COMPLY WITH CHAPTER 7. ALL SIGNAGE SHALL CONFORM WITH ACCESSIBILITY GUIDELINES AND LOCAL GUIDELINES INCLUDING BUT NOT LIMITED TO PROPORTION, COLOR CONTRAST AND RELIEF AND GRADE 2 BRAILLE REQUIREMENTS.
- WHEN PERMANENT IDENTIFICATION IS PROVIDED FOR ROOMS AND SPACES, RAISED LETTERS SHALL BE PROVIDED AND SHALL BE ACCOMPANIED BY BRAILLE IN CONFORMANCE WITH CHAPTER 7. SIGNS SHALL BE INSTALLED ON THE WALL ADJACENT TO THE LATCH SIDE OF THE DOOR. WHERE THERE IS NO WALL SPACE ON THE LATCH SIDE, INCLUDING AT DOUBLE LEAF DOORS, SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL, PREFERABLY ON THE RIGHT. MOUNTING HEIGHT SHALL BE 60" ABOVE THE FINISHED FLOOR TO THE CENTERLINE OF THE SIGN. MOUNTING LOCATION SHALL BE DETERMINED SO THAT A PERSON MAY APPROACH WITHIN 3" OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING WITHIN THE SWING OF A DOOR.

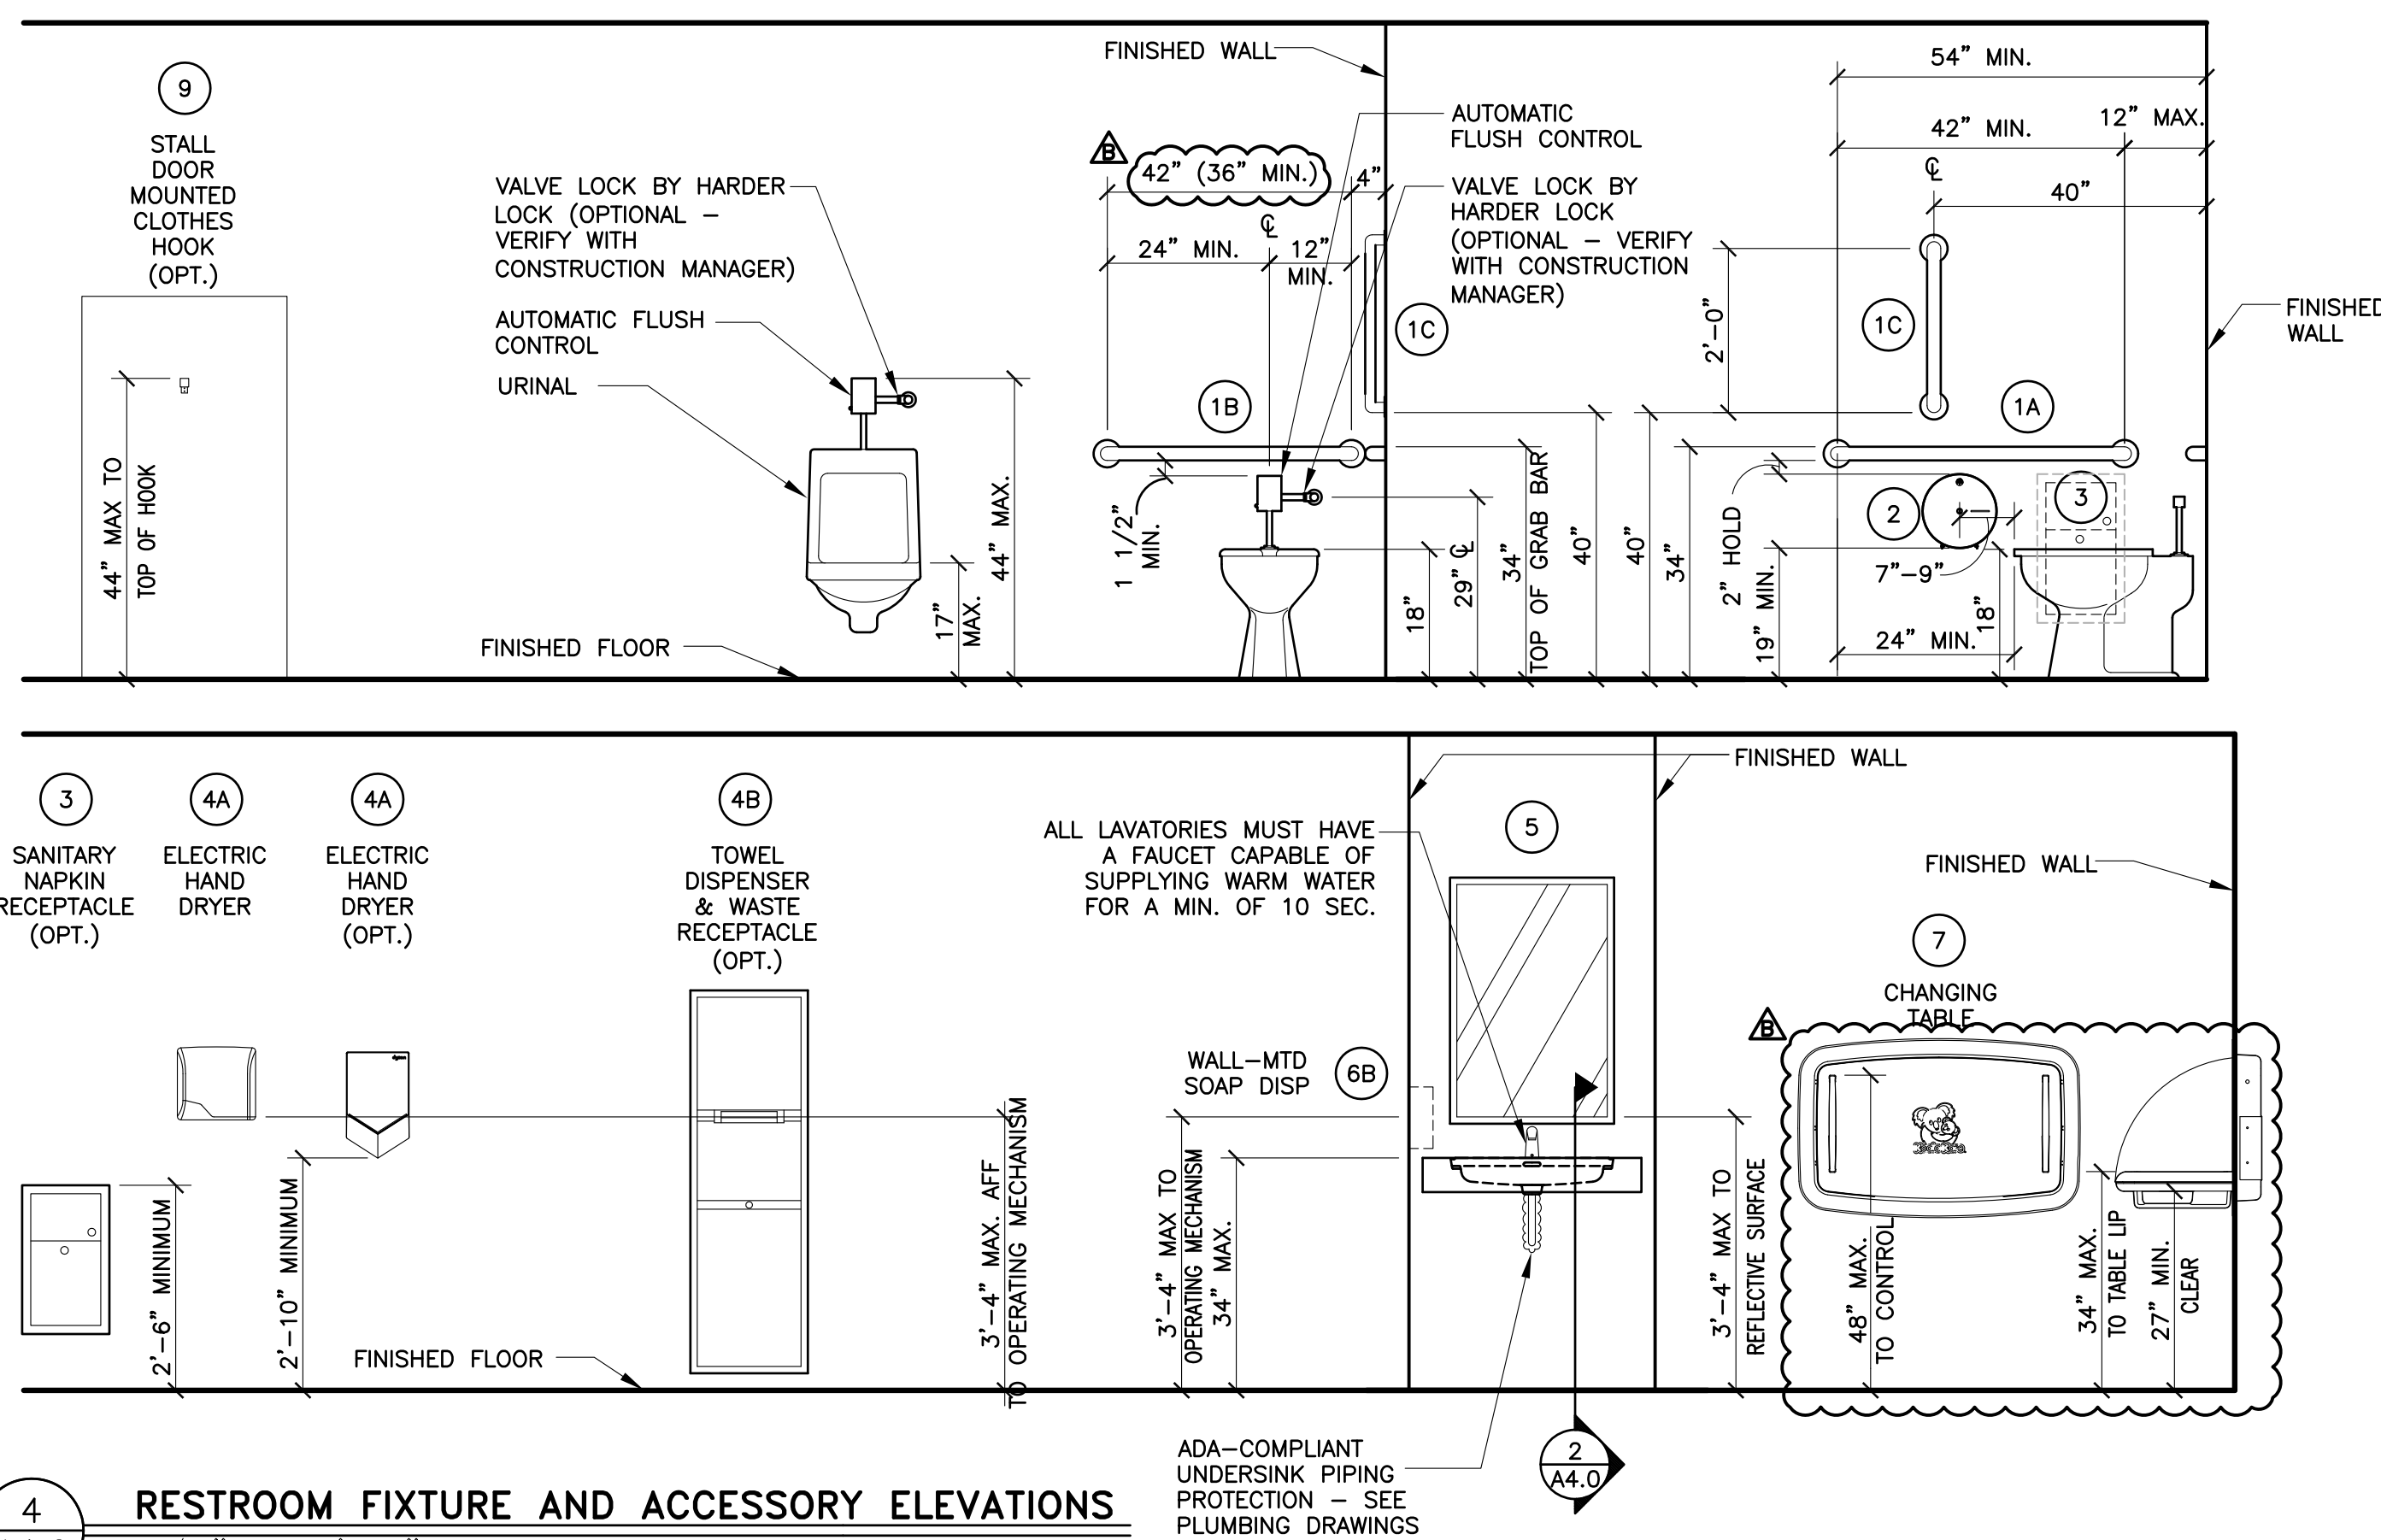

ITEM (SEE NOTE 2)	MFR MODEL #	SUPPLIER	BACKUP SUPPORT (SEE NOTE 3)
1A GRAB BAR 42"	BOBRICK B-6806X42	HUGHES SUPPLY (866) 310-3576	(1)2x6 4'-0" LONG CENTER MOUNTED
1B GRAB BAR 42"	B-6806X42	MCDCOORD@HAJOCA.COM	
1C GRAB BAR 24"	B-6806X24		
2 TOILET TISSUE DISPENSER, JUMBO, SURFACE MOUNTED	BRADLEY 5424	HUGHES SUPPLY (866) 310-3576	FRAME WALL OPENING PER MANUFACTURER'S RECOMMENDATIONS
3 SANITARY NAPKIN RECEPTACLE, RECESSED (OPTIONAL)	BOBRICK B-354	HUGHES SUPPLY (866) 310-3576	
4A HAND DRYER, ENERGY EFFICIENT MODEL, ADA, ALUMINUM BRUSHED	WORLD DRYER L-971 SlimDri	HUGHES SUPPLY (866) 310-3576	FRAME WALL OPENING PER MANUFACTURER'S RECOMMENDATIONS
4A HAND DRYER, ENERGY EFFICIENT MODEL ADA, SPRAYED NICKEL	DYSON AIRBLADE V	HUGHES SUPPLY (866) 310-3576	
4B TOWEL DISPENSER & WASTE RECEPTACLE, COMBINATION, RECESSED (OPTIONAL)	BOBRICK B-3974	HUGHES SUPPLY (866) 310-3576	
5 MIRROR, CHANNEL FRAME	BOBRICK B-165 2436	HUGHES SUPPLY (866) 310-3576	
6A SOAP DISPENSER, COUNTER MOUNTED, 6" SPOUT (OPTIONAL)	BOBRICK B-82216	HUGHES SUPPLY (866) 310-3576	
6B SOAP DISPENSER, WALL-MOUNTED	BOBRICK B-2112	HUGHES SUPPLY (866) 310-3576	
7 BABY CHANGING TABLE, HORIZONTAL, RECESSED, ADA COMPLIANT, STAINLESS STEEL	KOALA KARE KB310-SSRE	HUGHES SUPPLY (866) 310-3576	INSTALL PER MANUFACTURER'S RECOMMENDATIONS
7 BABY CHANGING TABLE, HORIZONTAL, SURFACE MOUNT, ADA COMPLIANT, STAINLESS STEEL	KOALA KARE KB310-SSWM	HUGHES SUPPLY (866) 310-3576	INSTALL PER MANUFACTURER'S RECOMMENDATIONS
8 DIAPER CONTAINER (OPTIONAL)	-	BY OWNER	
9 CLOTHES HOOK	BRADLEY 917	HUGHES SUPPLY (866) 310-3576	

- NOTES:**
- SEE 4/A4.0 FOR ACCESSORY MOUNTING HEIGHTS
  - SELECT ONE ITEM FROM ITEM GROUPS 4 & 6, VERIFY WITH AREA CONSTRUCTION MANAGER.
  - CUT BACK-UP SUPPORTS BETWEEN STUDS SO FACE OF SUPPORT IS FLUSH W/ WALL STUD

#### 3 RESTROOM ACCESSORY SCHEDULE

SHEET NO.	TITLE	DATE	REV	DATE	BY
1	2019 STANDARD BUILDING - BB20	2019-11			
2	4597F10- WOOD/WOOD	2019-11			
3	WOOD BEARING WALLS W/FIBER CEMENT SIDING & CI	2019-11			
4	WOOD ROOF TRUSS FRAMING	2019-11			
5	FIBER CEMENT PANEL/BATTEN/ALPOLC PANEL/BRICK EXT. FINISH	2019-11			
6	SITE ADDRESS	2019-11			
7	015-0071.00.B	2019-11			
8	A4.0	2019-11			
9	RESTROOM PLAN	2019-11			

McDonald's USA, LLC

ARCHITECTURE & PLANNING  
12400 PORTLAND AVENUE SOUTH, SUITE 100  
BURNSVILLE, MN 55337  
EMAIL: DATA@REPREXDESIGN.COM  
PHONE: (952) 252-4042  
FAX: (952) 252-4043

DESIGN

Signature: [Signature]  
Date: 12/03/20

Registration Number: 15320

Prepared By: [Signature]  
Date: 12/03/20